


Example: text-file-based marks for versions

Versioned Imposition with Text-File-Based Marks

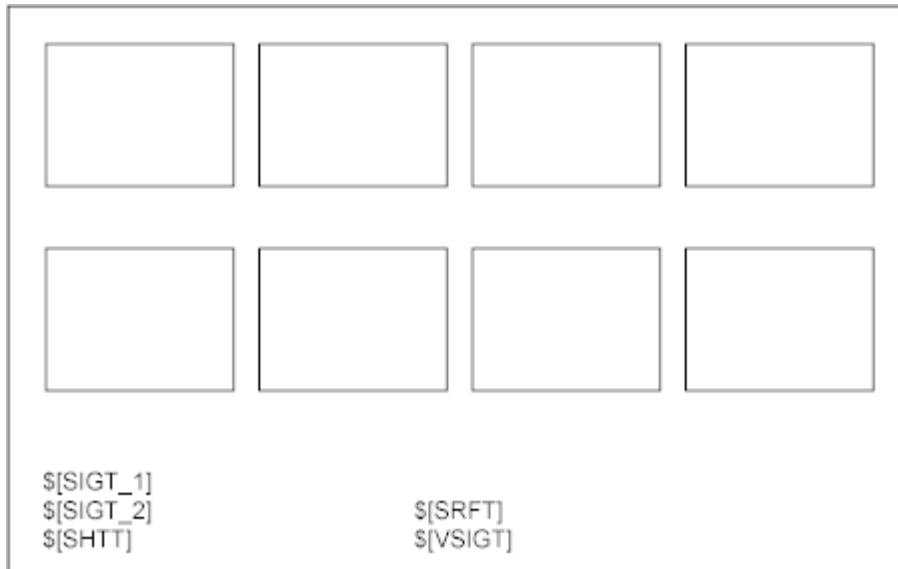

Text File

```
Signature 1 <Sig1 text1 goes here>; <Sig1 text2 goes here>
  Sheet 1 <Sheet1 text goes here>
    Surface A <SurfaceA text goes here>
      Version En <English text goes here>
      Version Fr <French text goes here>
      Version De <German text goes here>
    Surface B <SurfaceB text goes here>
      Version Ja <Japanese text goes here>
      Version Zh <Chinese text goes here>
      Version Ko <Korean text goes here>
  Sheet 2 <Sheet2 text1 goes here>
    Surface C <SurfaceC text goes here>
    ...
    Surface D <SurfaceD text goes here>
    ...
Signature 2 <Sig2 text1 goes here>; <Sig2 text2 goes here>
...
```

The Resulting Impositions

For signature 1, sheet 1, surface A, version En:

<Sig1 text1 text goes here> <Sig1 text2 text goes here> <Sheet1 text goes here>		<SurfaceA text goes here> <English text goes here>	

For signature 1, sheet 1, surface A, version Fr:

<Sig1 text1 text goes here> <Sig1 text2 text goes here> <Sheet1 text goes here>		<SurfaceA text goes here> <French text goes here>	

and so on...