


System RBA rule 'DSF Job Created'

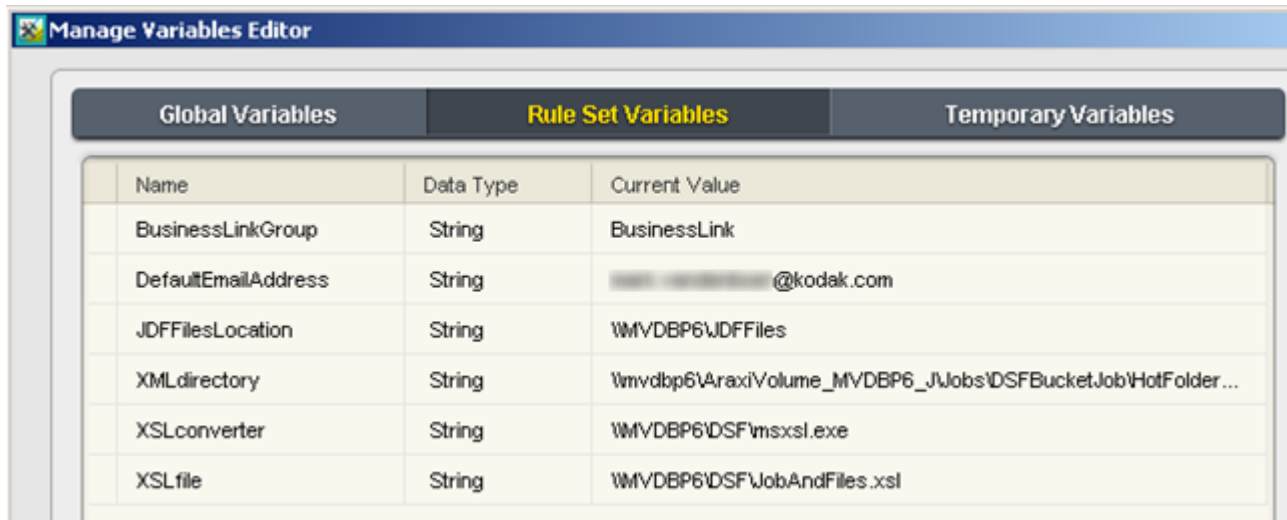

The screenshot shows the 'Manage Variables Editor' window with three tabs: 'Global Variables', 'Rule Set Variables' (selected), and 'Temporary Variables'. The 'Rule Set Variables' tab contains a table with the following data:

Name	Data Type	Current Value
BusinessLinkGroup	String	BusinessLink
DefaultEmailAddress	String	...@kodak.com
JDFFilesLocation	String	\\MVDBP6\JDFFiles
XMLdirectory	String	\\mvdbp6\AraxiVolume_MVDBP6_JJobs\DSFBucketJob\HotFolder...
XSLconverter	String	\\MVDBP6\DSF\msxsl.exe
XSLfile	String	\\MVDBP6\DSF\JobAndFiles.xsl

- **BusinessLinkGroup**—the group in Workshop in which Business Link creates its jobs
- **DefaultEmailAddress**—the address to which error emails will be sent
- **JDFFilesLocation**—the folder in which Business Link puts the JDF files. Typically the location is [\\primary-name\JDFFiles](#)
- **XMLdirectory**—the UNC path of the hot folder created in the **DSFBucketJob** job
- **XSLconverter**— the UNC path of the `msxsl.exe` file
- **XSLfile**— the UNC path of the XSL file used to extract data from the JDF file