


Retrieving a variable value

Each type of variable requires a unique prefix to reference it.

Type	Prefix	Example
Global	\$	%%\$SomeGlobalVariable%
Rule Set	#	%%#SomeRuleSetVariable%
Temporary	@	%%@SomeTemporaryVariable%

In most cases the reference is generated for you automatically. For example, if you assign a temporary variable named `JobName` directly to an action parameter, the selected variable name is converted to a variable reference string of the form `%%@JobName%`.

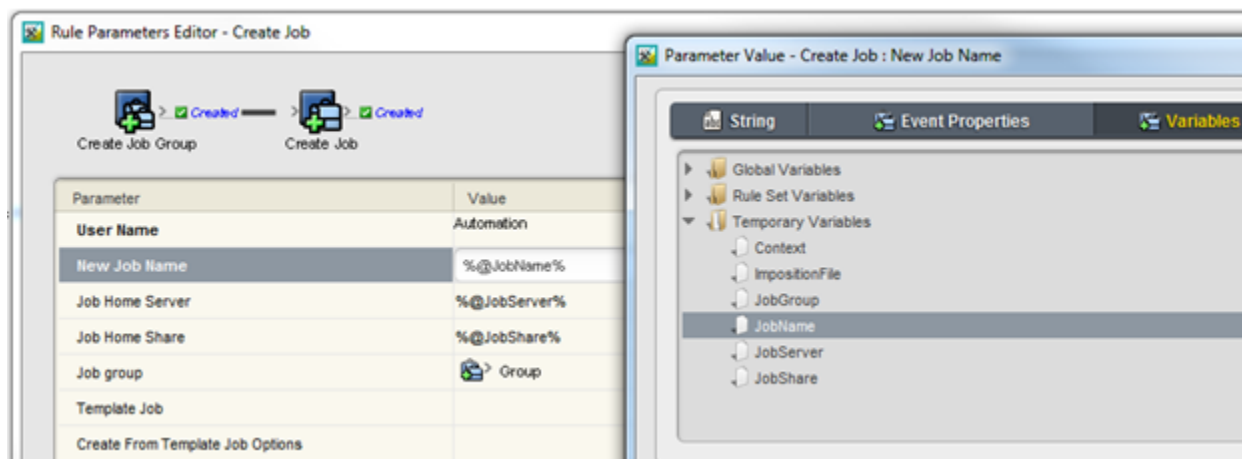

Variable references can also be used as part of expressions. To increment the value of a Rule Set variable named `UsageCount`, the value is the expression `1 + %%#UsageCount%`. This expression is evaluated at runtime and the result assigned back to **UsageCount**.

