


DSFBucketJob rule 'DSF Extracted XML'

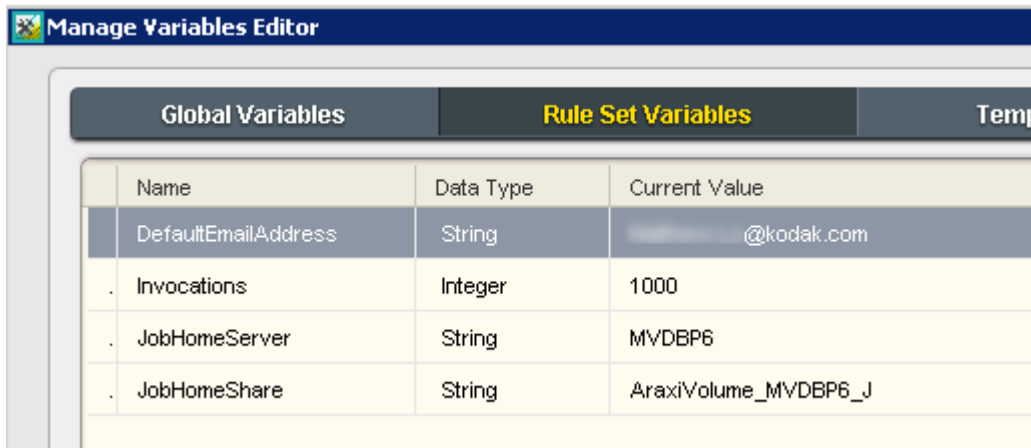

The screenshot shows the 'Manage Variables Editor' window with the 'Rule Set Variables' tab selected. It displays a table with four variables: DefaultEmailAddress, Invocations, JobHomeServer, and JobHomeShare. Each row includes the variable name, its data type, and its current value.

Name	Data Type	Current Value
DefaultEmailAddress	String	@kodak.com
Invocations	Integer	1000
JobHomeServer	String	MVDBP6
JobHomeShare	String	AraxiVolume_MVDBP6_J

- **DefaultEmailAddress**—the address to which error emails will be sent
- **Invocations**—the number of jobs created before a reminder email is sent out to the **DefaultEmailAddress** to remind the operator to clean up or delete jobs.
- **JobHomeServer**—the name of the server that will be used in the **Create Job** action
- **JobHomeShare**—the name of the share on the **JobHomeServer** server that will be used in the **Create Job** action